

SANICUBIC® 2 Pro




Product Ref: 6102

The Sanicubic® 2 Pro is a high performance macerating pump for commercial use. Contains two separate, load balanced pumps with high performance macerating systems and will operate alternately. In the event of inflow overload, both motors run at the same time, or in the unlikely event that one motor fails, the other one will take over.

Why choose this product?

- Ideal for busy business environments and larger domestic situations
- Tough, reliable macerator pump
- New design with easily removable motor for servicing and maintenance
- Water level indicator unit can be easily removed for maintenance
- Load balanced twin macerator pumps for a failsafe system
- Alternate activation ensures even wear of motors
- Two alarms for ultimate safety – hard-wired alarm plus remote wireless alarm
- Centre height of inlets 140mm
- Working temperature of 35°C. Will handle up to 70°C for short periods. (See Sanicom 1 and 2 for higher temperatures and longer periods)
- IP68 rated
- Can be connected to a Building Management System.

Vertical/horizontal performance

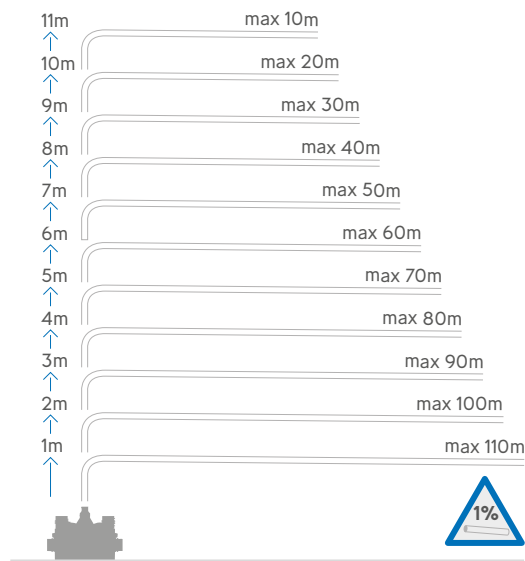

Note: Isolation valves must be fitted to the inlet pipework and discharge pipework to isolate the unit in case of the need for service

The Sanicubic tank is fitted with 2 dip tubes; one tube controls motor operation and the other controls the alarm system:

- Long pickup tube (normal operation): as soon as the waste water level in the tank reaches the triggering point in the long tube, the pumping system starts up.
- Short pickup tube (inflow overload operation): if the waste water level in the tank reaches the upper point, a contact is closed and the auxiliary pumping system is triggered. The contact also sets off an audible and visual alarm.

IP Ratings

IP or "Ingress Protection" ratings specify the environmental protection that the product casing provides and are defined by international standards. They are used to explain levels of sealing effectiveness of electrical enclosures against intrusion from foreign bodies e.g. dust, dirt and moisture.

Sanicubic 2 Pro has rating IP68 which gives protection against continuous submersion in water



Includes hard-wired alarm on externally mounted control box plus secondary high frequency remote wireless alarm.

Discharge Pipework
50mm

Motor Power
1500 Watts x 2

Flow Rate
13m³/h

Voltages
220-240 V/50 Hz


Tank Volume
45L

Working Waste Water Temp
35°C/Max 70°C (intermittent)



Product Weight
33kg

Inlet Pipework
40 / 50 / 100 / 110mm



IP Rating
IP68

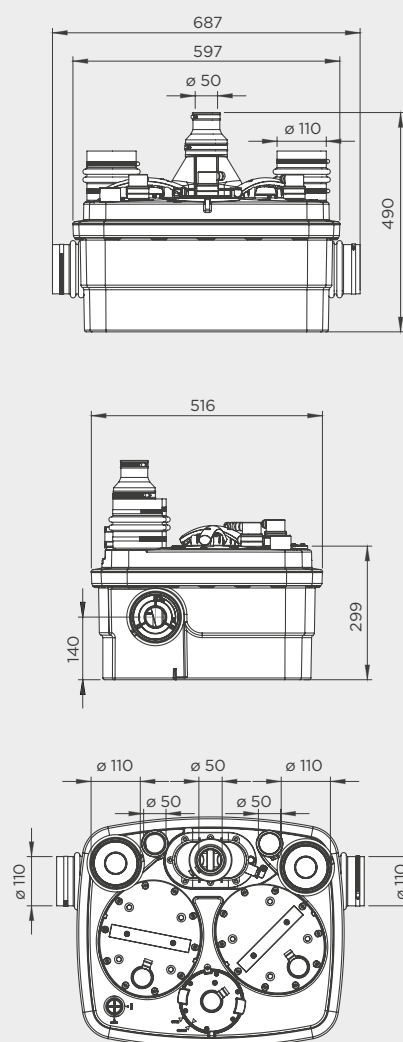


Discharge height (m)

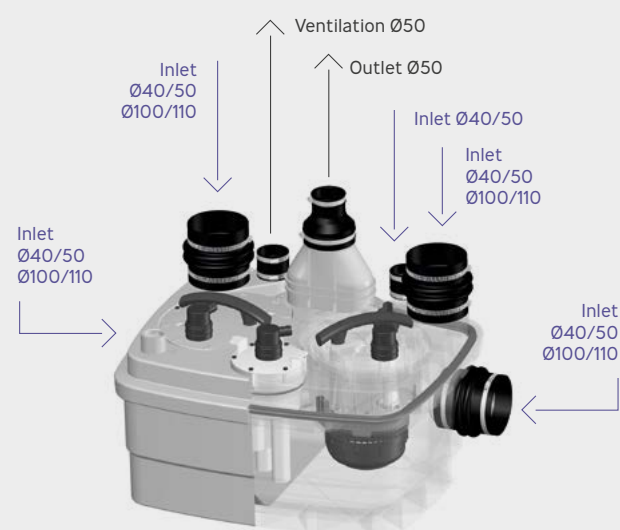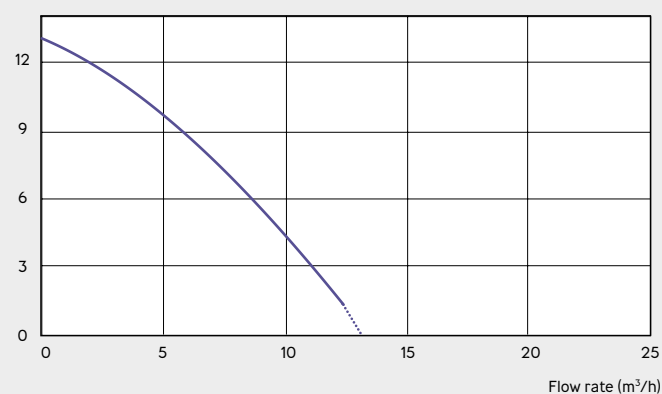

Externally mounted control box

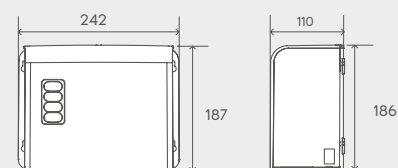

Remote wireless alarm





Gtksnab

Оборудование для жизни

Мы ценим каждого клиента и предлагаем широкий ассортимент продукции. Оборудование соответствует всем директивам безопасности и имеет необходимые лицензии. Быстрая доставка по всей России и СНГ. Самовывоз со склада в Москве. Квалифицированные специалисты всегда готовы проконсультировать и помочь подобрать нужные запчасти. Доверьтесь нашему многолетнему опыту и надежности поставок! Интернет-магазин "Gtksnab".

Остались вопросы?

Нужно подобрать или заказать деталь?



Email
order@gtksnab.ru



Телефон
[+7 \(495\)131-57-49](tel:+7(495)131-57-49)



Whatsapp
[+7\(985\) 991-80-53](https://wa.me/79918053)



Telegram
[@gtksnab](https://t.me/gtksnab)



Сайт
gtksnab.ru